



## H.OIL Oil/Water Interface Meter...certified intrinsically safe

The **H.OIL** interface meter is a PRECISION INSTRUMENT used to ACCURATELY measure the thickness of product layers (LNAPL) as thin as 1mm (1/200ft) floating on the water table. It will also detect and measure sinking layers of product (DNAPL). The **H.OIL** with its slim 16mm (5/8in) probe is ideal for wells, piezometers and direct push equipment as narrow as 19mm (3/4in). The tape and probe will withstand attack by hydrocarbons, solvents and other contaminants. This unit is used by professionals involved with the monitoring and remediation of ground water contaminated with oil products. The **H.OIL** interface meters INTRINSIC SAFETY CERTIFICATION allow it to be used in storage tanks and areas where explosive gases may be present.

The HERON **H.OIL** is among the best selling interface meter on the market today noted for ease of use and accuracy.

The **H.OIL** I/F meter is a robust easy to operate instrument designed to work RELIABLY, ACCURATELY and CONSISTENTLY. The probe and the electronic module can be changed in minutes with no special tools or training.

Thousands of HERON INTERFACE meters are giving RELIABLE service and ACCURATE readings on job sites worldwide.




## The Heron H.OIL Interface Meter

### FEATURES

- ◆ An ACCURATE tape made to a recognized North American standard (ASME)
- ◆ Tape jacketed in HYDROCARBON RESISTANT Kynar® All printing under the jacketing
- ◆ Certified INTRINSICALLY SAFE to CSA/NRTL standards
- ◆ Uses well proven optical technology
- ◆ Detects DNAPL and LNAPL layers
- ◆ Able to measure layers as thin as 1mm (1/200 ft)
- ◆ Field changeable probe
- ◆ Ten year limited warranty
- ◆ Unbeatable service
- ◆ Carrying bag and cleaning kit included

Kynar Jacketed Tape with Stainless Steel Conductors  
(ASME Standard) Accurate to 0.01%

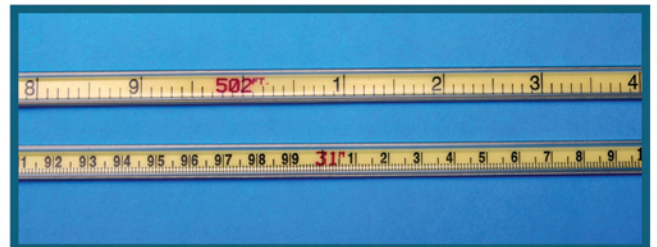

## Quality, accuracy and reliability.



The Heron **H.OIL** Oil/Water Interface Meter is Accurate, Durable, Easy to use.....and Safe



## SPECIFICATIONS

- ◆ Kynar Jacketed Tape
- ◆ For use with L.N.A.P.L. & D.N.A.P.L
- ◆ Tape Conforms to A.S.M.E. Standard accurate to 0.01%
- ◆ 10 year limited warranty
- ◆ Certified Intrinsically Safe
- ◆ The best product support in the industry

### Weight & Dimensions

Reel Weight	5 lbs (2 kg)
Tape per 100ft	2.5 lb (1 kg)
Overall Height	13.5 inch (34 cm)
Width	10 inch (25 cm)
Depth	8 inch (20 cm)

### Signal Convention

Solid Tone/Light = Oil  
Intermittent Tone/Light = Water

### Lengths Available

From 50 ft (15m)  
To 1000 ft (300m)

### Optional Field Support Kit

